

SHARPTO: SECT
ATTN: MR. VINCENT LIN
FM: OSKTN S. NAKAMURAREF: A-440
(44 page)
Apr. 17, 1998

1/44

SPEC No. E L 0 8 9 1 1 2
ISSUE: Nov 1 1996

To: _____

SPECIFICATIONS

Product Type VIDEO PROCESSING IC FOR COLOR TFT LCDModel No. IR3Y31M
AN-RCB-06


*This specifications contains 44 pages including the cover and appendix.
If you have any objections, please contact us before issuing purchasing order.

CUSTOMERS ACCEPTANCE

DATE: _____

BY: _____

PRESENTED

BY: T. Ohno
T. OHNO
Dept. General Manager

REVIEWED BY:

PREPARED BY:

H. Fujita H. MorikawaDevices Engineering Dept.
Tenri Division
Tenri Integrated Circuits Group
SHARP CORPORATION

SHARP

IR3Y31M

- Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.
- When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.
 - (1) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in Paragraph (2), even for the following application areas, be sure to observe the precautions given in Paragraph (2). Never use the products for the equipment listed in Paragraph (3).
 - Office electronics
 - Instrumentation and measuring equipment
 - Machine tools
 - Audiovisual equipment
 - Home appliances
 - Communication equipment other than for trunk lines
 - (2) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.
 - Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
 - Mainframe computers
 - Traffic control systems
 - Gas leak detectors and automatic cutoff devices
 - Rescue and security equipment
 - Other safety devices and safety equipment, etc.
 - (3) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.
 - Aerospace equipment
 - Communications equipment for trunk lines
 - Control equipment for the nuclear power industry
 - Medical equipment related to life support, etc.
 - (4) Please direct all queries and comments regarding the interpretation of the above three Paragraphs to a sales representative of the company.
- Please direct all queries regarding the products covered herein to a sales representative of the company.

SHARP

IR3Y31M

1

C O N T E N T S

1. Description	... 2
2. Terminal Name	... 3
3. Terminal Assignments	... 4
4. Block Diagram	... 5
5. Description of Terminals	... 6
6. Functional Operation	... 13
7. Precautions	... 16
8. Absolute Maximum Ratings	... 17
9. Electrical Characteristics	... 18
10. Test Circuit	... 34
11. Application Circuit Example	... 35
12. Package and packing Specification	... 39

SHARP

IR3Y31M

2

1. Description

The Sharp IR3Y31M is a compact multi-functional IC with a luminance, chroma, interface and sync separator circuit for the NTSC/PAL TFT LCD color monitors all integrated onto a single chip. This IC contains a luminance AGC circuit, gamma correction circuits to convert composite video signal or Y/C signal to RGB signal that meets the specific requirements of the LCD panels.

Applications:

LCD color viewfinders, televisions and monitors

Features:

- (1) Low power dissipation (160mW TYP.)
- (2) Applicable to both NTSC and PAL (Simple PAL only)
- (3) Accepts composite video signal and Y/C signal input
- (4) Built-in TRAP and HPF
- (5) Built-in image control circuit
- (6) Built-in AGC circuit (AGC OFF function)
- (7) Built-in gamma correction circuits
- (8) Built-in polarity inverter circuits
- (9) Accepts external analog R.G.B. inputs
- (10) Built-in RB output signal delay circuits (S/H form)
- (11) Built-in Blanking circuits

* Not designed or rated as radiation hardened

* Packaging material:

Plastic

* Chip material and wafer substrate type:

P type silicon

* Number of pins and package type:

48-pin quad-flat

Package (0.5mm pitch)

* Process (Structure):

Bipolar

SHARP

IR3Y31M

3

2. Terminal Name

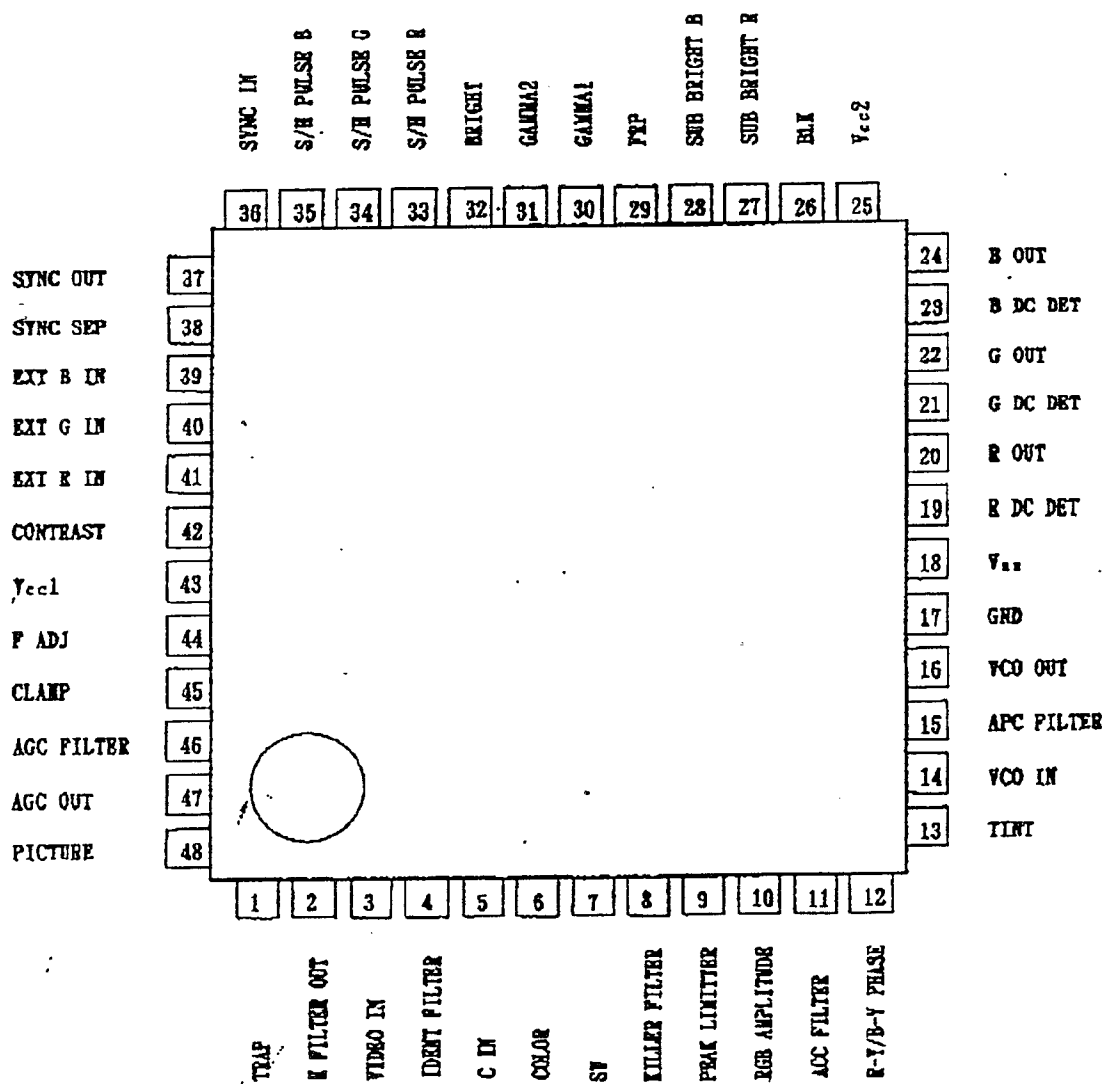
Pin No.	Terminal Name	Pin No.	Terminal Name
1	TRAP	25	Vcc2
2	H FILTER OUT	26	BLK
3	VIDEO IN	27	SUB BRIGHT R
4	IDENT FILTER	28	SUB BRIGHT B
5	C IN	29	FRP
6	COLOR	30	GAMMA1
7	SV	31	GAMMA2
8	KILLER FILTER	32	BRIGHT
9	PEAK LIMITTER	33	S/H PULSE R
10	RGB AMPLITUDE	34	S/H PULSE G
11	ACC FILTER	35	S/H PULSE B
12	R-Y/B-Y PHASE	36	SYNC IN
13	TINT	37	SYNC OUT
14	VCO IN	38	SYNC SEP
15	APC FILTER	39	EXT B IN
16	VCO OUT	40	EXT G IN
17	GND	41	EXT R IN
18	Vxx	42	CONTRAST
19	R DC DET	43	Vcc1
20	R OUT	44	F ADJ
21	G DC DET	45	CLAMP
22	G OUT	46	AGC FILTER
23	B DC DET	47	AGC OUT
24	B OUT	48	PICTURE

SHARP

IR3Y81M

4

3. Terminal Assignments (TOP VIEW)



1 R 3 Y 3 1 M

5

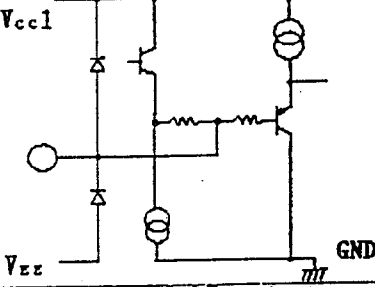
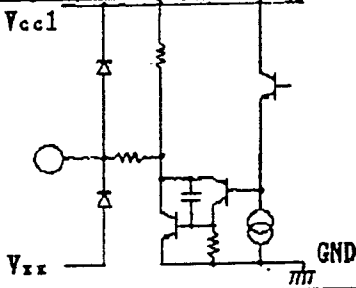
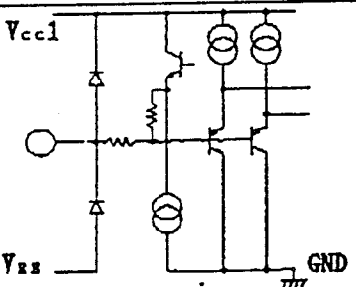
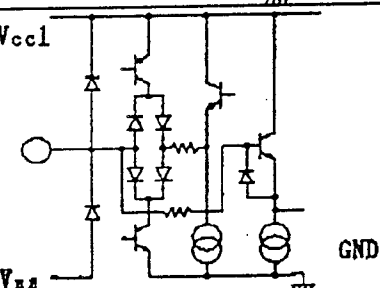

[illegible]

SHARP

IR3Y81M

6

5. Description of Terminals ($V_{cc1}=4.5V$)

Term. No	Term. Name	voltage	Equivalent Circuit	Description
1	TRAP	2.0V		Connected to TRAP.
2	H FILTER OUT			Outputs video signal for sync separator circuit.
3	VIDEO IN	2.25V		Input composite video signal. (Inputs luminance signal in the case of Y/C input).
4	IDENT FILTER			Connected to the IDENT detector filter.
5	C IN	2.5V		Input the chrominance signal in the case of Y/C input. When this terminal is connected to ground, the composite video signal input is accepted.

SHARP

IR3Y31M

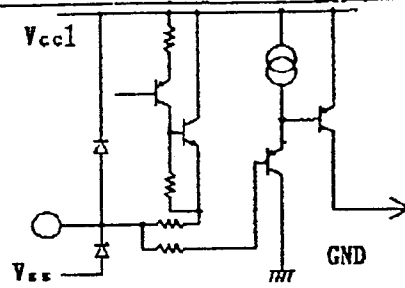
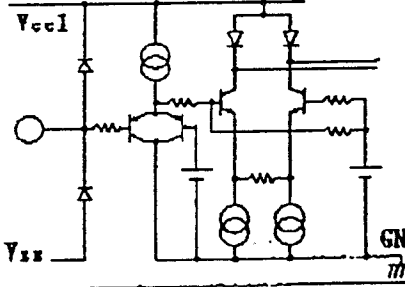
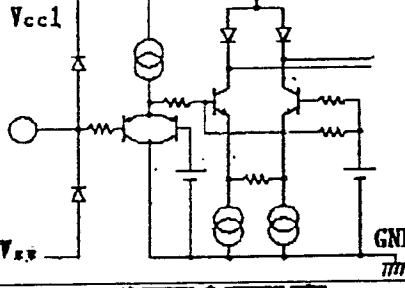
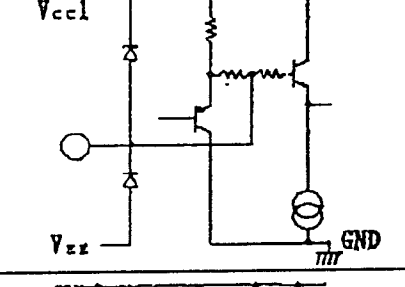
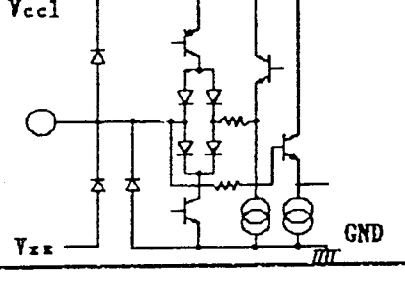
7

Term. No.	Term. Name	voltage	Equivalent Circuit	Description
6	COLOR			The DC voltage applied to this terminal adjusts the color gain.
7	SW			The input terminal for the source selection signal. Give the "Low" level in case of the VIDEO IN inputs, and give the "High" level in case of the EXT RGB IN inputs.
8	KILLER FILTER			Connected to the killer detector filter.
9	PEAK LIMITER			The DC voltage applied to this terminal adjusts the white limit level.
10	RGB AMPLITUDE	0.7V		Adjusts the amplitude between the inverted level and the non-inverted level of the R.G.B. outputs. This terminal is preset inside the IC. Do not lower the DC voltage under 0.7V.

SHARP

IR3Y31M

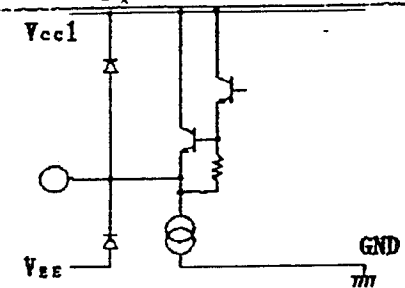
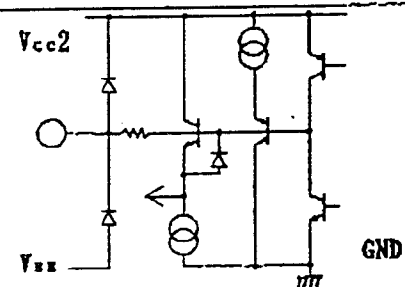
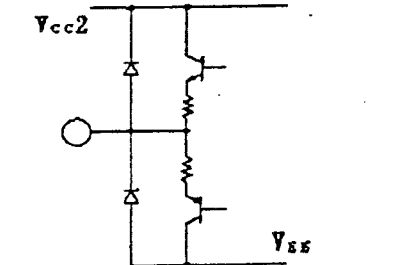
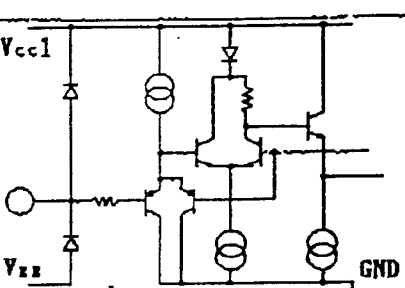
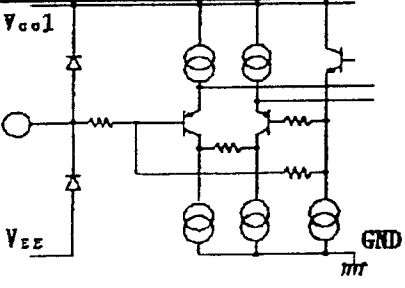
8

Term. No.	Term. Name	Voltage	Equivalent Circuit	Description
1 1	ACC FILTER			Connected to the ACC detector filter.
1 2	R-Y/B-Y PHASE			Adjusts the angle of the R-Y/B-Y in case of the PAL mode. Connect to VCC1 for NTSC mode.
1 3	TINT			The voltage applied to this terminal adjusts the tint. Corrects the color of output amplitude every 1H in case of the PAL mode.
1 4	VCO IN	3.9V		Input terminal for oscillator circuit.
1 5	APC FILTER			Connected to APC detector filter.

SHARP

IR3Y31M

9

Term. No.	Term. Name	Voltage	Equivalent Circuit	Description
1 6	VCO OUT	2.7V		Output terminal for oscillator circuit.
1 7	GND			Ground.
1 8	Vss			Negative going power supply
1 9 2 1 2 3	R DC DET G DC DET B DC DET			Connected to the capacitor that smoothes and holds the deviation from the R.G.B. outputs DC voltage. Because of the high impedance, use less leaky capacitor.
2 0 2 2 2 4	R OUT G OUT B OUT	$\frac{V_{cc2} + V_{ss}}{2}$		Outputs the primary color signal.
2 5	Vcc2			Connected to power supply for the R.G.B. outputs.
2 6	BLK			The input terminal of the Blanking pulse. "High": Blanking "Low" : No Blanking
2 7 2 8	SUB BRIGHT R SUB BRIGHT B	1.5V		The DC voltage applied to these terminals adjusts the brightness of the R and B signals finely. The gamma correction curve link the voltage of their terminals. These terminals are preset inside the IC.

SHARP

IR3Y31M

10

Term. No.	Term. Name	Voltage	Equivalent Circuit	Description
29	FRP			Input the invert signal that goes "Low" level in the case of inverted and "High" level in the case of non-inverted.
30	GAMMA1			Adjusts the inflection point(γ1) on the DC voltage gain of the gamma correction. When this terminal is connected to Vcc1, the gamma correction is OFF.
31	GAMMA2	1.5V		Adjusts the inflection point(γ2) on the DC voltage gain of the gamma correction. This terminal is preset inside the IC.
32	BRIGHT			The DC voltage applied to this terminal adjusts the brightness of RGB outputs. Gamma correction curve doesn't link this terminal voltage.
33 34 35	S/H PULSE R S/H PULSE G S/H PULSE B			Input the sampling pulse for RB output delay circuit. "High": hold "Low": sample "ALL Low": No delay Vth=1.5V

SHARP

IR3Y31M

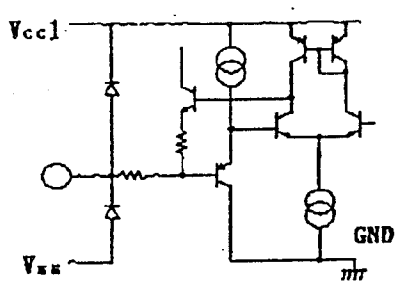
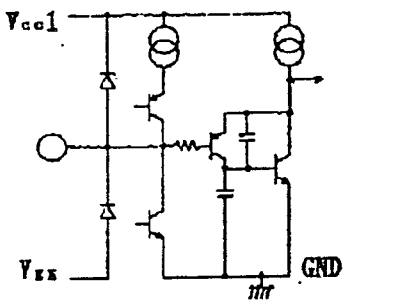
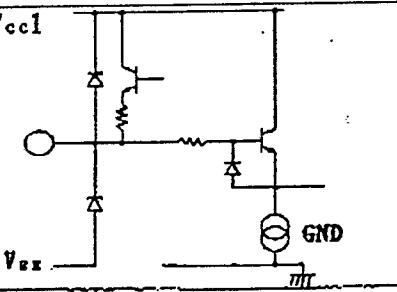
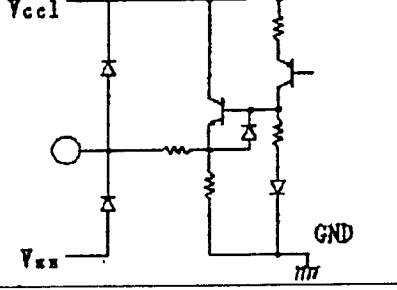
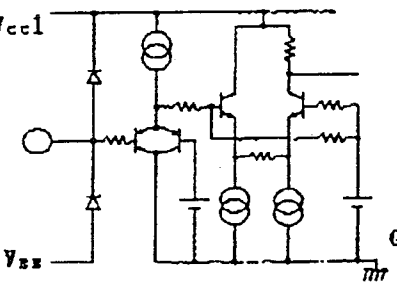
11

Term. No.	Term. Name	Voltage	Equivalent Circuit	Description
3 6	SYNC IN			The rising edge of this input pulse must be before the fall edge of the SYNC OUT pulse. In the case of PAL mode, inner flip-flop switches at the rising of the input pulse.
3 7	SYNC OUT			Outputs the sync signal separated by the sync separator circuit. The output is provided by an open collector. This output signal goes "High" level when in sync and "Low" level when out of sync.
3 8	SYNC SEP	1.8V		Inputs the video signal to the sync separator circuit. Input the H FILTER output signal.
3 9 4 0 4 1	EXT B IN EXT G IN EXT R IN			The input terminal of the external analog RGB signal. The coupling capacitor works as a pedestal clamp capacitor.
4 2	CONTRAST			The DC voltage applied to this terminal adjusts the contrast of R.G.B. output.

SHARP

IR3Y31M

12

Term. No.	Term. Name	Voltage	Equivalent Circuit	Description
4 3	Vcc1			Connected to power supply.
4 4	F ADJ	1.2V		The value of the resistance connected between this terminal and GND adjusts the frequency characteristics of the filters. In the case of both NTSC and PAL mode, connect the resistance of 18kΩ. Resistance accuracy $\pm 2\%$ Temp. stability $\pm 200\text{ppm}$
4 5	CLAMP			Connected to the capacitor that clamps the pedestal of the luminance line. Because of the high impedance, use less leaky capacitor.
4 6	AGC FILTER			Connected to the AGC detector filter for luminance line. When this terminal is connected to Vcc1, the AGC gain is fixed.
4 7	AGC OUT			Outputs the voltage detected at the AGC detector circuit for luminance line. The output voltage goes "High" at high-gain.
4 8	PICTURE			The DC voltage applied to this terminal adjusts the frequency characteristics of the luminance line. The outline is emphasized by reducing the terminal voltage.

SHARP

IR3Y31M

13

(17/44)

6. Functional operation

* TRAP

TRAP frequency is switched between 3.58MHz(NTSC) and 4.43MHz(PAL). In the case of the Y/C input, the signals do not pass through the TRAP.

* AGC circuit

Different AGC characteristics can be obtained according to the APL level of the luminance signal.

Detects the peak of the amplitude of the luminance signal to form the AGC loop.

When the AGC FILTER terminal is connected to Vcc, the AGC gain is fixed.

* ACC detection, ACC amplifier

Detects the peak of the amplitude of the burst signal to form the ACC loop.

* VCO, APC detection

The VCO local oscillator circuit is a pierce type X'tal oscillator circuit.

The APC and the VCO organize a PLL loop to eliminate the need for adjustment. The APC detector compares the phase of the burst signal with the VCO oscillation output, and the APC detector output controls the oscillating frequency of the VCO.

* External inputs

Input the analog RGB signals.

Because the each terminal of the External inputs is clamped, the signal is required to be AC coupled.

Clamp timing is a back-porch.

SHARP

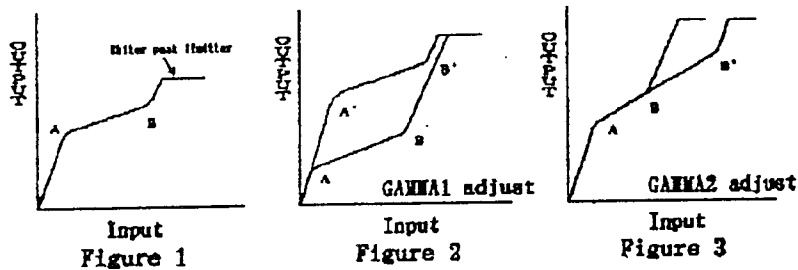
IR3Y31M

14

* Gamma correction

Corrects the output characteristics curve as shown in Figure 1 according to the LCD panel. Pin 30 and 31 adjust the γ_1 and γ_2 positions where the ramp of the curve can be adjusted as shown in Figure 2 and Figure 3.

Gamma adjustment doesn't influence the peak limit level.



* RGB outputs

The R.G.B. outputs (Pins 20, 22, 24) are inverted according to the FRP pulse input to Pin 29 as shown in Figure 4.

The feedback loops that keep the center voltages of the output signals at $(V_{CC} + V_{EB})/2$ are used.

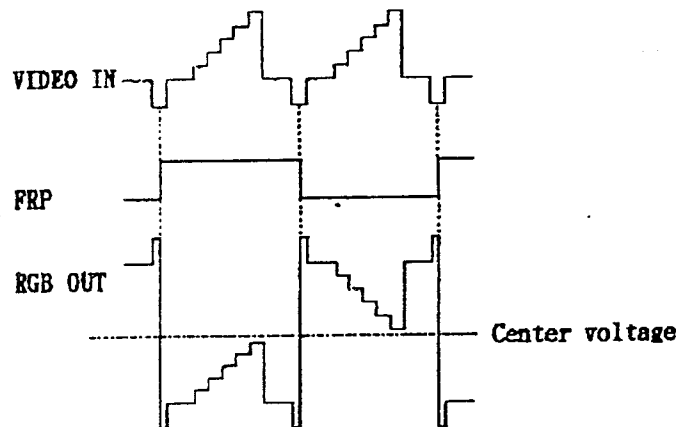


Figure 4

SHARP

IR3Y31M

15

- Blanking function

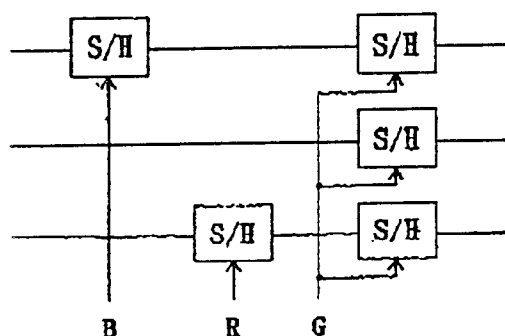
Give the "High" level in case of the Blanking.

Blanking operation is permitted during the synchronize pulse timing.

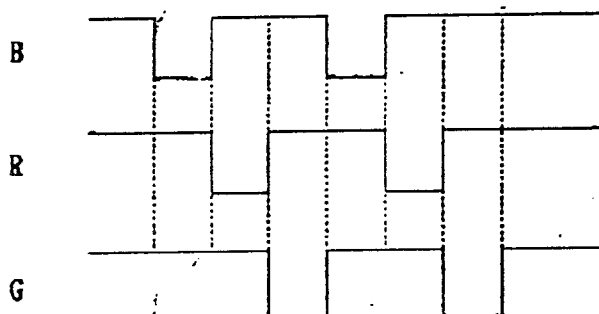
The DC voltage applied to RGB AMPLITUDE adjusts the blanking level.



- R B delay circuit (S/H form)



The pulse in order of G-R-B output signal. (sampling = "Low")



Sampling Pulse Width : 40~150ns

Pulse Level : 3V~Vcc1

duty : 1/3 active low-pulse

- Adjustment (PAL)

This IC support simple PAL only.

Adjust the TINT terminal in order to equalize the amplitude on R output signal by the 1H. Then Adjust the R-Y/B-Y PHASE terminal in order to equalize the amplitude on B output signal every 1H.

SHARP

IR3Y31M

16

7. Precautions*** Power supply pin**

Ensure Pin 18 is at the lowest potential and not open.
Make sure the voltage applied to power supply pin
must be as follows: $V_{EE} \leq GND \leq V_{CC1} \leq V_{CC2}$

*** The procedure of turning on the power supply**

When the value of V_{xx} is minus, turn on V_{xx} first.

*** Whitebalance adjust**

SUB BRIGHT R.B (Pin 27, 28) is pre-set inside the IC.

When these pre-set terminals are in operation without regulating
whitebalance in LCD display system, the whitebalance could be
lost by electronic components deviation in the system.

Therefore, regulating the whitebalance, in some way, is recommended.

SHARP

IRSY31M

17

8. Absolute Maximum Ratings (Ta=25°C)				
Parameter	Symbol	Condition	Rating	Units
Supply voltage	V _{cc1} - GND		7	V
	V _{cc2} - V _{EE}		17	V
	V _{EE} - GND		-10	V
Power dissipation	P _D	Ta ≤ 25°C	560	mW
Derating ratio		Ta > 25°C	4.5	mW/°C
Operating temperature range	Topr		-30 ~ 85	°C
Storage temperature range	Tstg		-55 ~ 150	°C
Each adjust pin voltage	V _{IN}		V _{cc1}	V
SYNC OUT output withstand voltage	V _{SD}		V _{EE} +17	V
Video input pin signal voltage	V _{VIDIN}		3	V _{p-p}
External input pin signal voltage	EXT _{IN}		V _{cc1}	V
FRP input pin signal voltage	FRP _{IN}		V _{cc1}	V
SYNC IN input pin signal voltage	SYNC _{IN}		V _{cc1}	V
Operating supply voltage ranges				
Parameter	Symbol	Condition	Rating	Units
Operating supply voltage range	V _{cc1} -GND		4.25~5.25	V
	V _{cc2} -GND		4.25~16.0	V
	V _{EE} -GND		-8.75~0	V
	V _{cc2} -V _{EE}		11.25~16.0	V
Recommended operating conditions				
Parameter	Symbol	Condition	Rating	Units
COMPOSITE VIDEO IN input signal voltage	V _{VDIN}	pedestal-white	0.7	V _{p-p}
LUMINANCE IN input signal voltage	V _{IN}	pedestal-white	0.7	V _{p-p}
CHROMINANCE IN input signal voltage	C _{IN}	Amplitude of burst signal	0.3	V _{p-p}
Adjust terminal input voltage	V _{IN}		0~3.0	V
External input pin signal voltage	EXT _{IN}	pedestal-white	0.7	V _{p-p}
Sampling pulse voltage	V _{SR}		3.0~V _{cc1}	V

SHARP

IR3Y31M

18

9. Electrical characteristics

DC characteristics

Unless otherwise specified, $V_{cc1}=4.5V$, $V_{cc2}=12V$, $V_{xx}=GND$, $T_a=25^\circ C$, SW5-a, SW8-a, SW10-OFF, SW20-OFF, SW22-OFF, SW24-OFF, SW26-b, SW27-OFF, SW28-OFF, SW31-OFF, SW33-b, SW34-b, SW35-b, SW38-a, SW46-OFF

$V_6=2.6V$, $V_7=0V$, $V_9=3.0V$, $V_{12}=4.5V$, $V_{13}=1.5V$, $V_{26}=0V$, $V_{30}=3.0V$, $V_{32}=2.1V$, $V_{33}=0V$, $V_{34}=0V$.

$V_{35}=0V$, $V_{42}=1.5V$, $V_{48}=1.5V$

SG11 applied to (C) and SG7b(4.5Vp-p) applied to (D).

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
Current dissipation (pin 43)	I _{cc1}			25.0	35.0	mA
Current dissipation (pin 25)	I _{cc2}			3.0	4.3	mA
Current dissipation (pin 43) operation in S/H circuit	I _{cc1}			27.0	37.0	mA
TRAP output impedance	Z ₁			1.0		kΩ
VIDEO IN input impedance	Z ₃			12.0		kΩ
C IN input impedance	Z ₅			3.6		kΩ
RGB AMPLITUDE input impedance	Z ₁₀			53		kΩ
SUB BRIGHT R input impedance	Z ₂₇			153		kΩ
SUB BRIGHT B input impedance	Z ₂₈			153		kΩ
GAMMA 2 input impedance	Z ₃₁			53		kΩ
C IN input current	I ₅	V ₅ =GND		4.0	6.0	μA
COLOR input current	I ₆	V ₆ =GND		-0.3	-1.0	μA
SW input current	I ₇	V ₇ =GND		-0.3	-1.0	μA
PEAK LIMITTER input current	I ₉	V ₉ =GND		-0.3	-1.0	μA
R-Y/B-Y PHASE input current H	I _{12H}	V ₁₂ =GND		0.2	1.0	μA
R-Y/B-Y PHASE input current L	I _{12L}	V ₁₂ =GND		-0.3	-1.0	μA
TINT input current	I ₁₃	V ₁₃ =GND		-0.3	-1.0	μA
BLK input current	I ₂₆	V ₂₆ =GND		-0.2	-1.0	μA
FRP input current	I ₂₉	V ₂₉ =GND		-0.2	-1.0	μA
GAMMA 1 input current H	I _{30H}	V ₃₀ =4.5V		0.2	1.0	μA
GAMMA 1 input current L	I _{30L}	V ₃₀ =GND		-0.3	-1.0	μA
BRIGHT input current	I ₃₂	V ₃₂ =2.5V		0.2	1.0	μA
S/H PULSE R input current	I ₃₃	V ₃₃ =GND		-0.5	-2.0	μA
S/H PULSE G input current	I ₃₄	V ₃₄ =GND		-0.5	-2.0	μA
S/H PULSE B input current	I ₃₅	V ₃₅ =GND		-0.5	-2.0	μA
SYNC IN input current	I ₃₆	V ₃₆ =GND		-0.2	-1.0	μA
CONTRAST input current	I ₄₂	V ₄₂ =GND		-0.2	-1.0	μA
PICTURE input current	I ₄₈	V ₄₈ =GND		-0.5	-2.0	μA
TRAP terminal voltage	V ₁		1.7	2.0	2.3	V
VIDEO IN terminal voltage	V ₃		1.95	2.25	2.55	V
C IN terminal voltage	V ₅		2.2	2.5	2.8	V
RGB AMPLITUDE terminal voltage	V ₁₀	V ₁₀ =OPEN	0.4	0.7	1.0	V
VCO IN terminal voltage	V ₁₄		3.6	3.9	4.2	V
VCO OUT terminal voltage	V ₁₆		2.4	2.7	3.0	V
SUB BRIGHT R terminal voltage	V ₂₇	V ₂₇ =OPEN	1.2	1.5	1.8	V
SUB BRIGHT B terminal voltage	V ₂₈	V ₂₈ =OPEN	1.2	1.5	1.8	V
GAMMA 2 terminal voltage	V ₃₁	V ₃₁ =OPEN	1.2	1.5	1.8	V
SYNC SEP terminal voltage	V ₃₈		1.4	1.8	2.2	V
F ADJ terminal voltage	V ₄₄		0.9	1.2	1.5	V

SHARP

IR3Y31M

19

AC characteristics

Unless otherwise specified: $V_{cc1}=4.5V$, $V_{cc2}=12V$, $V_{ss}=GND$, $T_a=25^\circ C$, SW5-a, SW7-b, SW8-a, SW10-OFF, SW20-OFF, SW22-OFF, SW24-OFF, SW26-b, SW27-OFF, SW28-OFF, SW31-OFF, SW33-b, SW34-b, SW35-b, SW38-a, SW46-OFF
 $V_5=0V$, $V_6=1.5V$, $V_7=0V$, $V_9=3.0V$, $V_{12}=4.5V$, $V_{13}=1.5V$, $V_{26}=0V$, $V_{30}=4.5V$, $V_{32}=2.1V$, $V_{33}=0V$, $V_{34}=0V$, $V_{35}=0V$, $V_{42}=3.0V$, $V_{46}=4.5V$, $V_{48}=2.5V$
 SG11 applied to (C) and SG7b(4.5Vp-p) applied to (D).

Video Part

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
Luminance maximum gain (1) (AGC ON)	G_{max1}	With $V_{42}=0V$ and SG8(-17dB) applied to (A). Measures the ratio of the output amplitude (black-white) to the input amplitude on TP22.	32	35	38	dB
Luminance maximum gain (2) (AGC OFF)	G_{max2}	With $V_{42}=0V$, SW46-ON, $V_{46}=4.5V$ and SG8(-17dB) applied to (A). Measure the ratio of the output amplitude (black-white) to the input amplitude on TP22.	27	30	33	dB
AGC ON-OFF switch voltage	$V_{th,cc}$	Measure the DC voltage on TP46 that causes TP22 to change from Luminance maximum gain to G_{max2} .	3.7	4.0	4.2	V
AGC amplitude characteristics	V_{a1}	With SW46-OFF, SG1(0dB) applied to (A), and APL=50%, adjust V_{42} so that the amplitude (black-3rd level) of the output on TP22 is 4V. Observe the waveform on TP22 as APL is changed to 10% and 90%. The amplitude (Black-3rd level) at these APL shall be V_{a1} and V_{a2} respectively.	4.5	5.5	6.5	Vp-p
	V_{a2}		2.1	2.6	3.1	Vp-p
AGC detection output voltage	V_{ad1}	With SW46-OFF and SG1(0dB) applied to (A), when APL is changed to 10%, 50% and 90%, the voltages on TP47 shall be V_{ad1} , V_{ad2} and V_{ad3} respectively.	2.2	2.7	3.2	V
	V_{ad2}		1.0	1.5	2.0	V
	V_{ad3}		0.2	0.4	0.7	V
Image quality adjust variable range (composite signal input, NTSC)	G_{p1}	With SW5-b and SG2(100kHz) applied to (A), adjust V_{42} so that the amplitude of the 100kHz component on TP22 is 1Vp-p. With SG2(f=1.6MHz) applied, observe the difference of the amplitude on TP22 as V_{48} is changed to 0V and 3V. The amplitude difference at these two V_{48} voltages shall be G_{p1} and G_{p2} , respectively.	3.0	7.0		dB
	G_{p2}			-2.0	1.0	dB

SHARP

IR3Y31M

20

(2/44)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
Image quality adjust variable range (composite signal input, PAL)	Gp3	With SW5=b, V12=1.5V and SG2(100kHz) applied to (A), adjust V42 so that the amplitude of the 100kHz component on TP22 is 1Vp-p.	3.0	7.0		dB
	Gp4	With SG2(f=1.6MHz) applied, observe the difference of the amplitude on TP22 as V48 is changed to 0V and 3V. The amplitude difference at these two V48 voltages shall be Gp3 and Gp4, respectively.		-2.0	1.0	dB
Image quality adjust variable range (Y/C input)	Gp5	With SG2(100kHz) applied to (A), adjust V42 so that the amplitude of the 100kHz component on TP22 is 1Vp-p.	7.0	11.0		dB
	Gp6	With SG2(f=2.0MHz) applied, observe the difference of the amplitude on TP22 as V48 is changed to 0V and 3V. The amplitude difference at these two V48 voltages shall be Gp5 and Gp6, respectively.		0	3.0	dB
Trap attenuation (NTSC)	Gtf (NT)	With SG3(f=100kHz, 0dB) applied to (A), observe the waveform on TP1, the amplitude of the 100kHz component of the signal shall be v0. Then, apply SG3(f=3.58MHz, 0dB), the amplitude of the 3.58MHz component on TP1 shall be v1. $Gtf = 20 \log (v1/v0)$	-30	-47		dB
Trap attenuation (PAL)	Gtf (PAL)	With V12=1.5V and SG3(f=100kHz, 0dB) applied to (A), observe the waveform on TP1, the amplitude of the 100kHz component of the signal shall be v0. Then, apply SG3(f=4.43MHz, 0dB), the amplitude of the 4.43MHz component on TP1 shall be v1. $Gtf = 20 \log (v1/v0)$	-30	-47		dB
DC reproduction ratio	X	With SG1(APL10%, 0dB) applied to (A), measure the amplitude (black-black) on TP22. Let the measured amplitude be V1. Then with SG1(APL90%, 0dB) applied to (A), measure the amplitude (black-black) on TP22. Let the measured amplitude be V2. $X = ((V1 - V2) / V1) \times 100$	95			%

SHARP

IR3Y31M

21

(2/44)

Chroma part					
Parameter	Symbol	Conditions	MTN.	TYP.	MAX. Units
ACC characteristics (composite signal input, NTSC)	GA1	With SW5-b and SC5(0dB, +6dB, -25dB, burst/chroma phase=180°) applied to (A), measure the amplitude of waveform on TP24 at 0dB, +6dB and -25dB. Let the measured amplitude for each input be v0, v1 and v2.		0	2.0 dB
	GA2	GA1 = 20 log (v1/v0) GA2 = 20 log (v2/v0)	-12	-4.0	dB
	GA3	With SC5(0dB, +6dB, -25dB, burst/chroma phase=180°) applied to (B), measure the amplitude of waveform on TP24 at 0dB, +6dB and -25dB. Let the measured amplitude for each input be v0, v1 and v2.		0	2.0 dB
	GA4	GA3 = 20 log (v1/v0) GA4 = 20 log (v2/v0)	-5.0	0	dB
ACC characteristics (composite signal input, PAL)	GA5	With SW5-b, V12=1.5V and SC5(0dB, +6dB, -25dB, burst/chroma phase=135°) applied to (A), measure the amplitude of waveform on TP24 at 0dB, +6dB and -25dB. Let the measured amplitude for each input be v0, v1 and v2.		0	2.0 dB
	GA6	GA5 = 20 log (v1/v0) GA6 = 20 log (v2/v0)	-10	-3.0	dB
	GA7	With V12=1.5V and SC5(0dB, +6dB, -25dB, burst/chroma phase=135°) applied to (B), measure the amplitude of waveform on TP24 at 0dB, +6dB and -25dB. Let the measured amplitude for each input be v0, v1 and v2.		0	2.0 dB
	GA8	GA7 = 20 log (v1/v0) GA8 = 20 log (v2/v0)	-5.0	0	dB
Color control gain variable range	GC1	With SC5(0dB, burst/chroma phase = 180°) applied to (B), allow V6 to change to 0V, 1.5V then 3V to measure the amplitude on TP24. Let these amplitudes be v1, v0 and v2, respectively.		-30	-20 dB
	GC2	GC1 = 20 log (v1/v0) GC2 = 20 log (v2/v0)	4.0	6.0	dB

SHARP

IR3Y31M

22

(4/44)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
APC capture range (NTSC)	fa1	With SC5(0dB) applied to (B), allow the frequency of the burst signal to change to measure the input frequency at which the voltage on TP8 drops below 2V. Work out the difference by subtracting the measured frequency from 3.579545MHz.	±500	+1500 -800		Hz
APC capture range (PAL)	fa2	With V12=1.5V and SC5(0dB) applied to (B), allow the frequency of the burst signal to change to measure the input frequency at which the voltage on TP8 drops below 2V. Work out the difference by subtracting the measured frequency from 4.433619MHz.	±500	+1300 -1700		Hz
Killer operating input level (NTSC)	vbk1	With SC5(variable amplitude, burst/chroma phase = 180°) applied to (B), observe the waveform on TP24 as decreasing the input amplitude until the killer turns on. Measure the input attenuation.		-46	-40	dB
Killer operating input level (PAL)	vbk2	With V12=1.5V and SC5(variable amplitude, burst/chroma phase = ±135°) applied to (B), observe the waveform on TP24 as decreasing the input amplitude until the killer turns on. Measure the input attenuation.		-43	-37	dB
Killer color ghost (NTSC)	vbs1	With S18-b and SC5(burst/chroma phase = 180°) applied to (B), measure the amplitude of the color different output on TP24.		50	100	mVp-p
Killer color ghost (PAL)	vbs2	With S18-b, V12=1.5V and SC5(burst/chroma phase = ±135°) applied to (B), measure the amplitude of the color different output on TP24.		90	180	mVp-p
Demodulation output ratio (NTSC)	R-Y/B-Y	With SC5(0dB) applied to (B), allow the chroma phase to change. Let the amplitude causing the maximum amplitude on TP20 be VR. Let the amplitude causing the maximum amplitude on TP22 be VG. Let the amplitude causing the maximum amplitude on TP24 be VB. $(R-Y)/(B-Y)=VR/VB$ $(G-Y)/(B-Y)=VG/VB$	0.46	0.56	0.66	
	G-Y/B-Y		0.26	0.34	0.42	

SHARP

IR3Y31M

23

(2/44)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
Demodulation output ratio (PAL)	R-Y/B-Y	With V12=1.5V and SC5(0dB) applied to (B), allow the chroma phase to change. Let the amplitude causing the maximum amplitude on TP20 be VR. Let the amplitude causing the maximum amplitude on TP22 be VG. Let the amplitude causing the maximum amplitude on TP24 be VB. (R-Y)/(B-Y)=VR/VB (G-Y)/(B-Y)=VG/VB	0.44	0.54	0.64	
	G-Y/B-Y		0.26	0.34	0.42	
Demodulation relative phase (NTSC)	θ_{RB}	With SC5(0dB) applied to (B), allow the chroma phase to change. Let the angle causing the maximum amplitude on TP20 be θ_R . Let the angle causing the maximum amplitude on TP22 be θ_G . Let the angle causing the maximum amplitude on TP24 be θ_B . $\theta_{RB} = \theta_R - \theta_B$, $\theta_{GB} = \theta_G - \theta_B$	80	90	100	deg.
	θ_{GB}		225	235	245	deg.
Demodulation relative phase (PAL)	θ_{RB}	With V12=1.5V and SC5(0dB) applied to (B), allow the chroma phase to change. Let the angle causing the maximum amplitude on TP20 be θ_R . Let the angle causing the maximum amplitude on TP22 be θ_G . Let the angle causing the maximum amplitude on TP24 be θ_B . $\theta_{RB} = \theta_R - \theta_B$, $\theta_{GB} = \theta_G - \theta_B$	80	90	100	deg.
	θ_{GB}		220	230	245	deg.
Demodulation output residual carrier (NTSC)	VCAR(N)	With (C)=OPEN and SC5(0dB, burst/chroma =180°) applied to (B), adjust the chroma phase so that the amplitude on TP24 is at its maximum. Observe TP24 with a spectrum analyzer to measure the ratio of v1 to v0, where v1 is the 7.15909MHz component, v0 being the 15.734kHz component. VCAR1 = 20 log (v1/v0)		-60	-40	dB
	VCAR(P)	With V12=1.5V, (C)=OPEN and SC5(0dB, burst/chroma=135°) applied to (B), adjust the chroma phase so that the amplitude on TP24 is at its maximum. Observe TP24 with a spectrum analyzer to measure the ratio of v1 to v0, where v1 is the 8.867238MHz component, v0 being the 15.625kHz component. VCAR2 = 20 log (v1/v0)		-65	-45	dB

SHARP

IR3Y31M

24

(744)

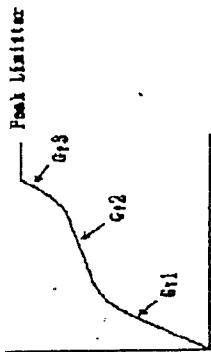
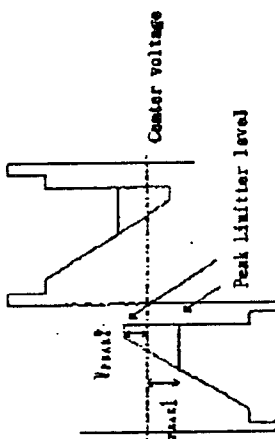
Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
TINT variable range	$\theta +$	With SG5(0db) applied to (B), allow the chroma phase to change. Let the angle causing the maximum amplitude on TP24 be $\theta 1$ in the case of V13=0V.	30	40		deg.
	$\theta -$	Let the angle causing the maximum amplitude on TP24 be $\theta 2$ in the case of V13=1.5V. Let the angle causing the maximum amplitude on TP24 be $\theta 3$ in the case of V13=3.0V. $\theta 1 = \theta 1 - \theta 2, \theta - = \theta 3 - \theta 2$	-30	-40		deg.
Composite-Y/C input switching voltage	VthCY	With SW5-b and SG5(0dB, burst/chroma phase = 180°) applied to (A), increase V5 from 0V until the signal from TP24 disappears. Measure the voltage on V5 that causes the signal to disappear.	1.3	1.5	1.7	V
Y/C-composite input switching voltage	VthVC	With SW5-b and SG5(0dB, burst/chroma phase = $\pm 135^\circ$) applied to (A), decrease V5 from 0V until the signal from TP24 appears. Measure the voltage on V5 that causes the signal to appear.	0.7	0.9	1.1	V
NTSC-PAL	VthNP	With SG5(0dB, burst/chroma phase = 180°) applied to (B), decrease V12 until the signal from TP24 disappears. Measure the voltage on V12 that causes the signal to disappear.	3.4	3.7	4.0	V

SHARP

IR3Y31M

26

(44)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
Gamma correction characteristics	G _{r1}	With V30=1.5V, SW31-ON, V31=1.5V, V42=0V (CONTRAST set Maximum), and SG9 applied to (A), measure the gain each specific point on the output waveform of TP20, TP22 and TP24. 	32	35	38	dB
	G _{r2}		17	21	25	dB
	G _{r3}		32	35	38	dB
Peak limiter characteristics	V _{peak1}	With V42=0V and SG8 applied to (A). Then V9=0.5V and V8=3V, measure the amplitude difference (center level - peak limiter level) on TP20, TP22 and TP24. 	2.5	3.0	3.5	V
	V _{peak2}		-4.8	-4.2	-3.6	V
Input - Output propagation delay time (composite video signal input)	tpLH1	With SG4 applied to (A), SF5-b, SW20-ON, SW22-ON, SW24-ON. Adjust V42 so that the amplitude (black-white) of TP20, TP22 and TP24 are 5Vp-p and measure the propagation delay time of the rising edge tpLH1, and that of the falling edge tpHL1.	450	660	870	ns
	tpHL1		450	660	870	ns
Input - Output propagation delay time (Y/C input)	tpLH2	With SG4 applied to (A), SW20-ON, SW22-ON, SW24-ON. Adjust V42 so that the amplitude (black-white) of TP20, TP22 and TP24 are 5Vp-p and measure the propagation delay time of the rising edge tpLH2, and that of the falling edge tpHL2.	300	500	700	ns
	tpHL2		300	500	700	ns

SHARP

IR3Y31M

27

2/44

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
EXT - Output Propagation delay time	tpLH3	With SW20-ON, SW22-ON, SW24-ON, V7=3.0V and SG4 applied to (F), (G), (H). Adjust V42 so that the amplitude (black-white) of TP20, TP22 and TP24 are 5Vp-p and measure the propagation delay time of the rising edge tpLH3, and that of the falling edge tpHL3.	30	80	130	ns
	tpHL3		60	120	180	ns
RGB output Rise time, Fall time (External input)	tTLH	With SW20-ON, SW22-ON, SW24-ON, V7=3.0V and SG10 applied to (F), (G), (H). Adjust V42 so that the amplitude (black-white) of TP20, TP22 and TP24 are 5Vp-p and measure the propagation delay time of the rising edge tTLH, and that of the falling edge tTHL.	40	90	160	ns
	tTHL		60	110	180	ns
Frequency characteristics	f1	With SW46-ON, SW20-ON, SW22-ON, SW24-ON, SG2(100kHz) applied to (A), measure the frequency f1 when the amplitude of the output TP20, TP22 and TP24 decreases 3dB lower than that of 100kHz at V48=0V, f2 at V48=3V.	4.5	7.0		MHz
	f2		3.5	5.0		MHz
	f3	With V7=3V, SG2 applied to (F), (G) and (H), measure the frequency f3 similarly.	2.5	3.7		MHz
RGB output amplitude adjust variable range	V _{AOB}	With no input to (A) and (B). Measure the amplitude differences (black-black) on TP20, TP22 and TP24 between SW10-0FF and SW10-ON, V10=3V.	4.0	5.1		V
BLK threshold voltage	V _{thBLK}	With SC8(-11dB) applied to (A), increase V26 from 0V until the signal of TP24 disappears. Measure the voltage on V26 that causes the signal to start disappearing.	1.2	1.5	1.9	V
S/H linear error	E _{LSHR}	With V7=3.0V, (K)="Low", (L)="Hi", SG12a applied to (J), SG12b applied to (H). Define, adjust amplitude on SG12b to 0.2Vp-p and 0.7Vp-p, measure the amplitude on TP20 as v1 and v2. Then (J)="Hi", (L)="Low", SG12a applied to (K), SG12b applied to (G). Define, adjust amplitude on SG12b to 0.2Vp-p and 0.7Vp-p, measure the amplitude on TP22 as v3 and v4. Then (J)="Hi", (K)="Low", SG12a applied to (L), SG12b applied to (F). Define, adjust amplitude on SG12b to 0.2Vp-p and 0.7Vp-p, measure the amplitude on TP24 as v5 and v6. $E_{LSHR} = ((0.2v2/0.7v1) \times 100, E_{LSHG} = ((0.2v4/0.7v3) \times 100, E_{LSHB} = ((0.2v6/0.7v5) \times 100$	90	100		%
	E _{LSHG}		90	100		%
	E _{LSHB}		90	100		%

SHARP

IR3Y31M

28

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Units
SW propagation delay time	tpLH4	With no input to (A), SG10 applied to (I), SG4 applied to (F), (G) and (H), SW7-a, SW20-ON, SW22-ON, SW24-ON.	60	120	180	ns
	tpHL4	Adjust V42 so that the amplitude (black-white) of TP20, TP22 and TP24 are 5Vp-p and measure the waveform of TP20, TP22 and TP24.	70	130	180	ns
BLK propagation delay time	tpLH5	With V32=2.5V, SG10 applied to (I), SW26-a, SW20-ON, SW22-ON, SW24-ON.	70	150	210	ns
	tpHL5	Adjust V42 so that the amplitude (black-white) of TP20, TP22 and TP24 are 5Vp-p and measure the waveform of TP20, TP22 and TP24.	140	210	290	ns
SW switching voltage	Vthsw	With SW7-a, SG8 applied to (F), increase V7 from 0V until the signal on TP24 appears. Measure the voltage on V7 that causes the signal to start appearing.	0.6	0.8	1.0	V
Input - Output maximum gain (External input)	Gext	With SW7-a, V42=0V, SG8(-14dB) applied to (F), (G) and (H). Measure the ratio of the output amplitude (white-black) on TP20, TP22 and TP24 to the input amplitude.	27	30	33	dB
Inside - Outside Voltage gain difference	ΔG _{in/EXT}	With SW5-b, SW7-a, SW46-ON, SG8 applied to (F), (G) and (H). Measure the amplitude (white-black) difference between output amplitude and with SG8 applied to (A), output amplitude on TP20, TP22 and TP24.	-2.0		2.0	dB

SHARP

IR3Y31M

29

(44)

Sync part				
Parameter	Symbol	Conditions	MIN	MAX
Sync separator input sensitivity current	Iis	Allow the current to flow out of (E), and measure the input current that causes IP37 to go from "Low" (4VCC) to "High" (4VCC).		22
Sync separator output ON-state voltage	Von	Measure the output voltage on TP37.		0.2
External sync input threshold voltage	Veth	Increase the amplitude of SG7b from 0V and measure the amplitude of SG7b that causes the clamp circuit to start operating.	1.2	1.5
H filter output gain	Ghf	With SG7a applied to (A), measure the amplitude on TP2.	3.5	4.5
H filter output propagation delay time	tpLH(HF)	With SG7a applied to (A), measure the propagation delay time to TP2.	500	800
	tpHL(HF)	rise time + tpLH(HF) fall time + tpHL(HF)	300	500
Sync separator output propagation delay time	tpLH(sync)	With SW38-b, SG7a(0.15Vp-p) applied to (A), measure the propagation delay time to TP37.	0.6	1.0
	tpHL(sync)	rise time + tpLH(sync) fall time + tpHL(sync)	0.3	0.7

Units

#A

V

V

dB

ns

ns

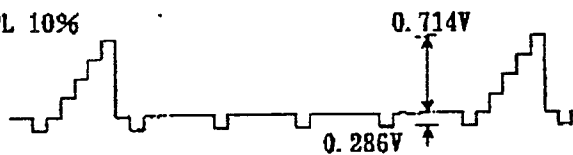


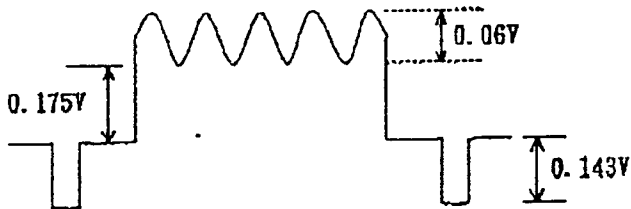
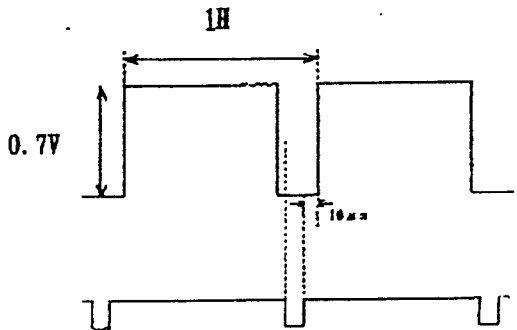
ns

ns

SHARP

IR3Y31M

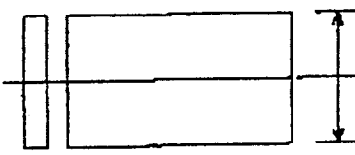
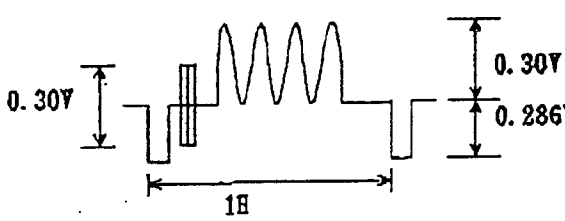
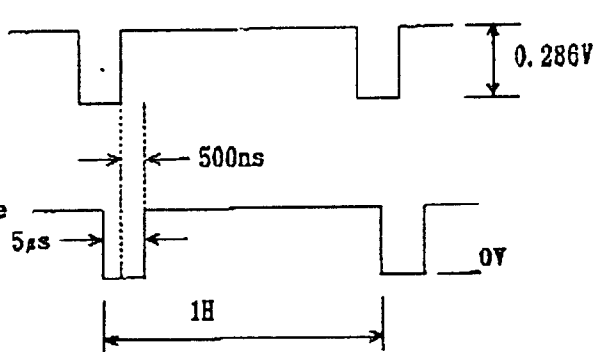
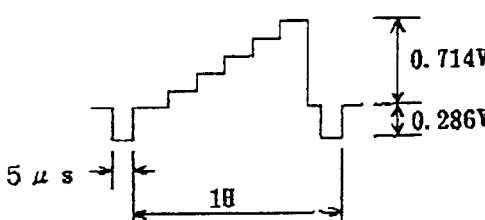
30

SG No.	Wave form
SG 1	Variable APL 5step stair signal APL 10%  0.714V 0.286V APL 50%  0.357V APL 90%  0.714V
SG 2	Sine video signal, variable frequency and amplitude  0.175V 0.06V 0.143V
SG 3	Sine signal amplitude 300mVp-p, variable frequency
SG 4	 0.7V 1H 10µs H-sync pulse

SHARP

IR3Y31M

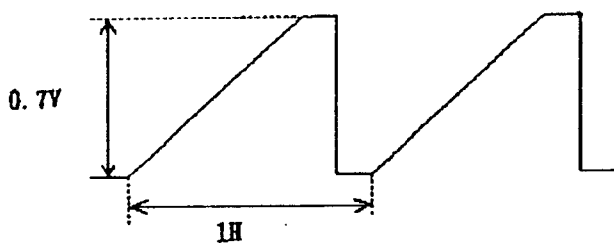
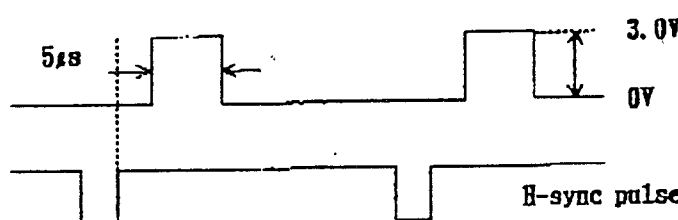
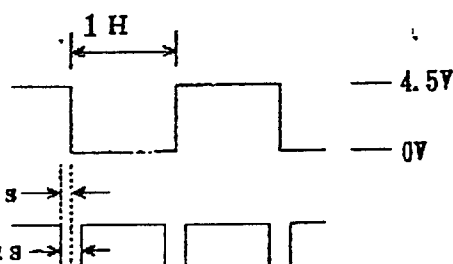
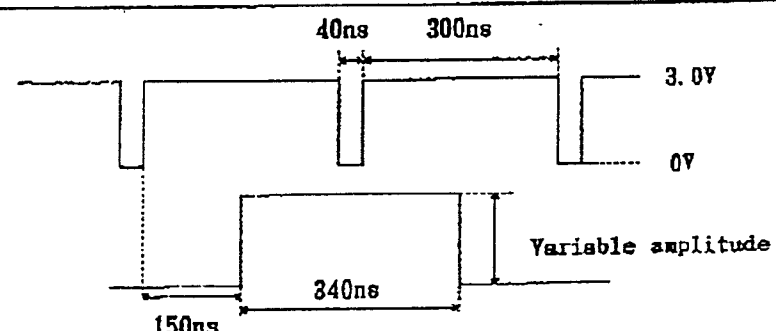
31

SG No.	Wave form
SG 5	Chrominance signal Burst amplitude 300mVp-p, chroma amplitude 300mVp-p burst and chroma frequency 4.433619MHz (PAL) Variable chroma phase 3.579545MHz (NTSC) 
SG 6	Sine video signal, Variable frequency 
SG 7	a Video input sync pulse b External sync pulse Variable amplitude 5μs 
SG 8	0dB 5step stair signal 

SHARP

IR3Y31M

32

SG No.	Wave form
SG 9	 0.7V 1H
SG 10	tr, tf < 50ns  5μs 3.0V 0V H-sync pulse Synchronized with H-Sync pulse
SG 11	FRP pulse tr, tf < 50ns  1H 4.5V 0V 2.5μs 5μs H-Sync pulse
SG 12	 40ns 300ns 3.0V 0V Variable amplitude 340ns 150ns a b

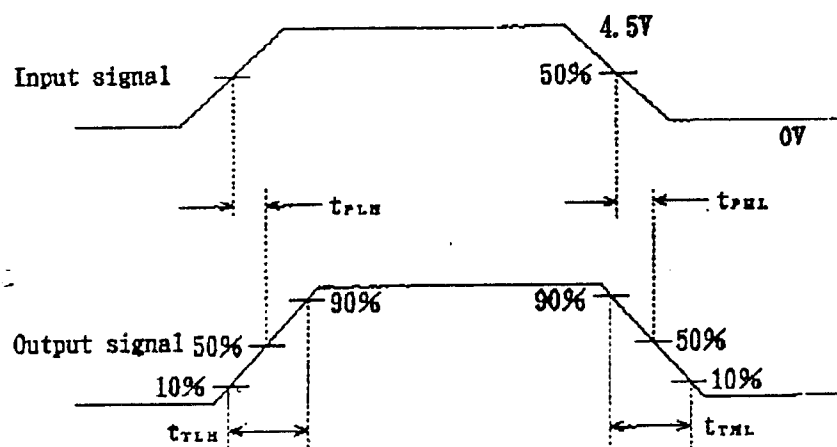
SHARP

IR8Y81M

33

(35/44)

Switching characteristics timing chart



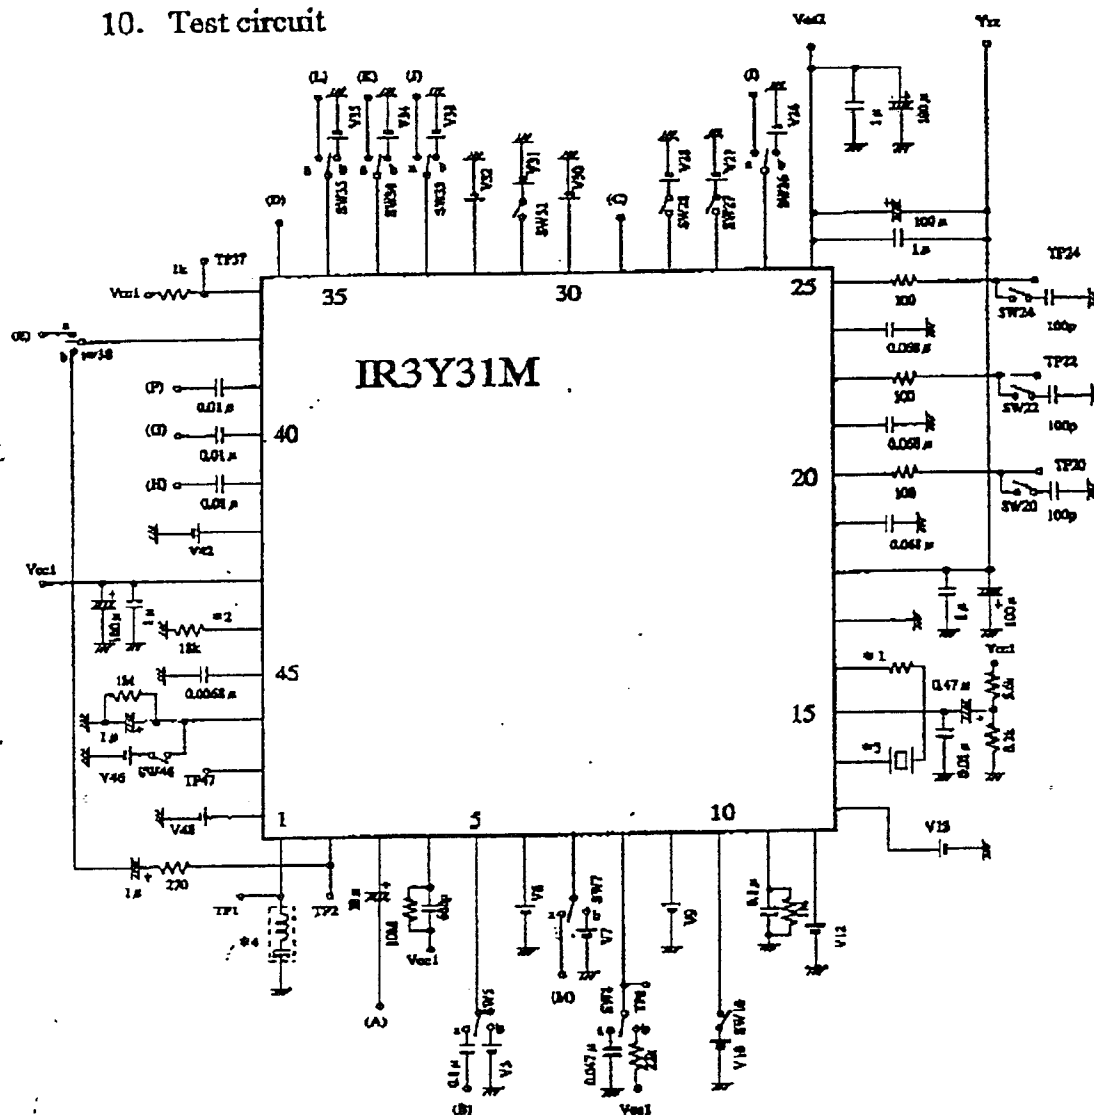
SHARP

IR3Y31M

34

(34/44)

10. Test circuit



- * 1 1k Ω (NTSC) , SHORT (PAL)
- * 2 Resistance Variability $\pm 2\%$, Temperature Characteristics $\pm 200\text{ppm}/^\circ\text{C}$
- * 3 DAISHINKU CORPORATION AT-49
 Frequency 3.579545MHz (NTSC mode)
 4.433619MHz (PAL mode)
 Load Capacitance 16pF
 Frequency Tolerance $\pm 30\text{ppm}$
 Temperature Characteristics $\pm 30\text{ppm}$
- * 4 TDK NLT 4532-S3R6B (NTSC mode)
 NLT 4532-S4R4 (PAL mode)

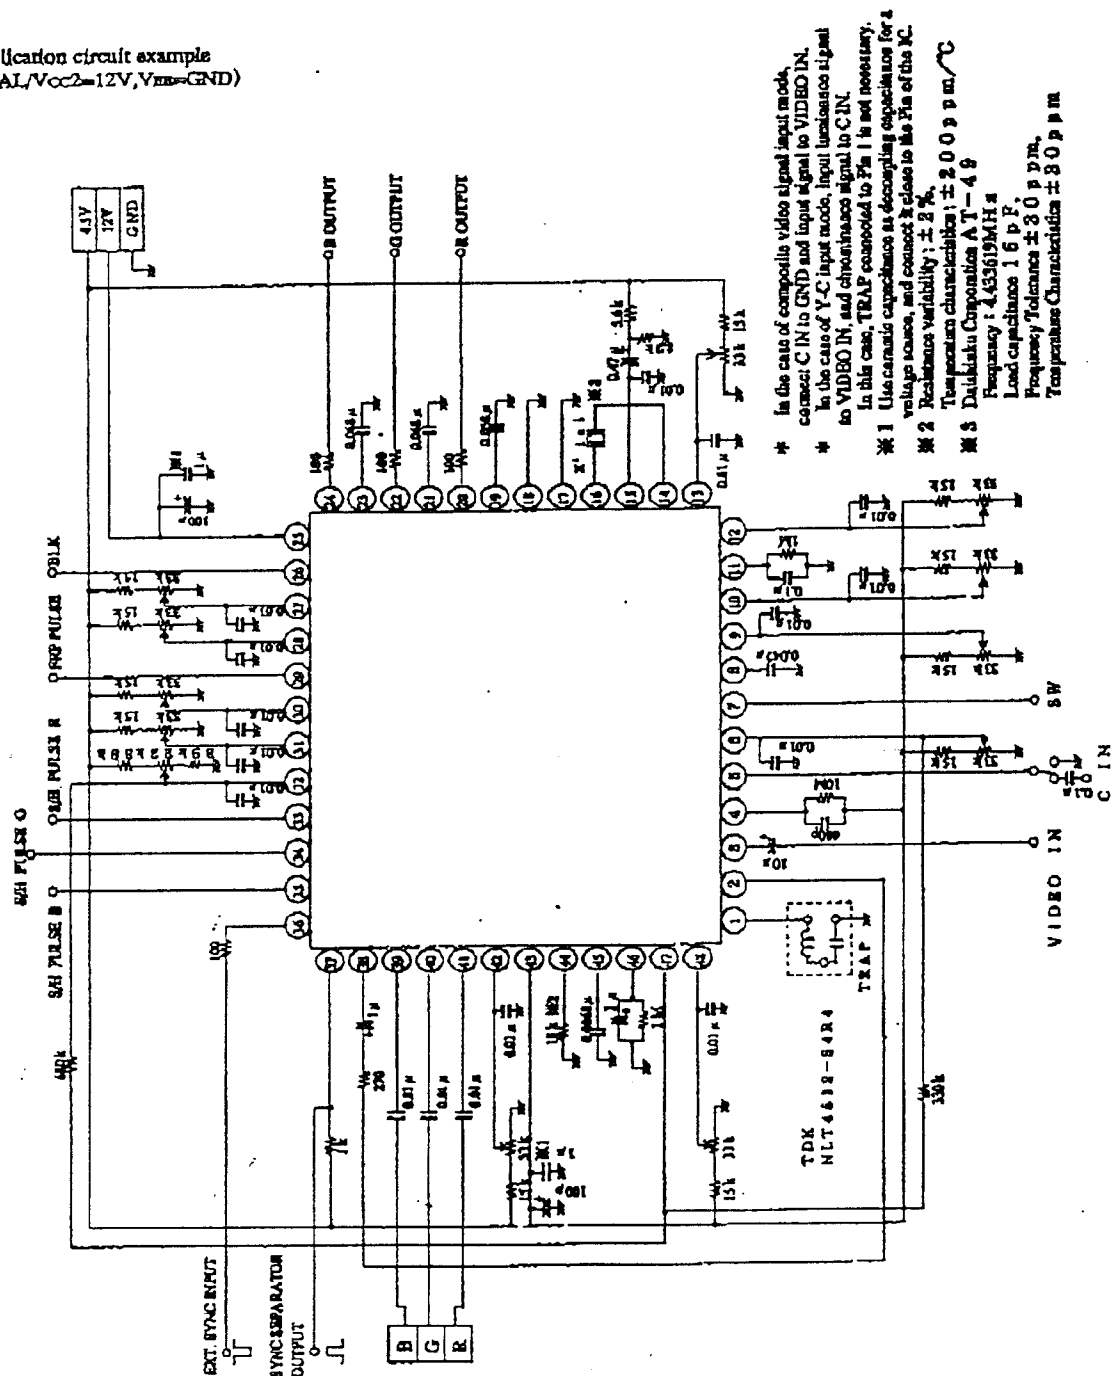
SHARP

IR3Y31M

35

(1/44)

Application circuit example
(PAL/ $V_{CC2}=12V$, $V_{REF}=GND$)



- * In the case of composite video signal input mode, connect C IN to GND and input signal to VIDEO IN.
- * In the case of Y-C input mode, input luminance signal to VIDEO IN, and chrominance signal to C IN.
- * In this case, TRAP connected to Pin 1 is not necessary.
- * 1 Use ceramic capacitors as decoupling capacitors for a voltage source, and connect it close to the Pin of the IC.
- * 2 Resistance variability: $\pm 2\%$.
- * 3 Temperature characteristics: $\pm 200 \text{ p p m}/^\circ\text{C}$.
- * 4 Frequency: 4.433619MHz.
- * 5 Load capacitance: 16 p F .
- * Frequency Tolerance: $\pm 30 \text{ p p m}$.
- * Temperature Characteristics: $\pm 30 \text{ p p m}$.

IR 3 Y 3 1 M

(744)

- * In the case of compatible video signal input mode, connect C/N to QND and input signal to VIDEO IN.
- * In the case of Y-C input mode, input luminance signal to VIDEO IN, and chrominance signal to C/N.

In this case, "TRAP" connected to Pin 1 is not necessary.

※1 Use ferro-sputtered as decoupling capacitance for a video's source, and connect it close to the pin of the IC.

※2 Radiation variability: $\pm 2\%$

※3 Temperature characteristics: $\pm 200 \text{ p.p.m.}/^{\circ}\text{C}$

※4 Datasheet Composition AT-48

Frequency: 4.433619MHz

Load capacitance 16 pF

Frequency Tolerance $\pm 30 \text{ p.p.m.}$

Temperature Characteristics $\pm 30 \text{ p.p.m.}$

IR3Y31M

37

(137/44)

- * In the case of composite video signal mode, connect C1N to GND and input signal to VIDEO IN.
- * In the case of Y-C input mode, input luminance signal to VIDEO IN, and chrominance signal to C1N.
- * In this case, TRAP connected to Pin 1 is not necessary.
- * Use ceramic capacitors as decoupling capacitors for a voltage source, and connect it close to the Pin of the IC.
- * Resistance variability: $\pm 2\%$
- * Temperature characteristics: $\pm 200 \text{ ppm}/^{\circ}\text{C}$
- * Dissipation Capacitance A.T.-49
- * Frequency: 3.579545 MHz $\pm$
- * Load capacitance 16 pF
- * Frequency Tolerances $\pm 3.0 \text{ ppm}$
- * Temperature Characteristics $\pm 3.0 \text{ ppm}$

SHARP

IR3Y81M

39

(4/4)

12 Package and packing specification**1. Package Outline Specification**

Refer to drawing No. AA1035

2. Markings**2-1. Marking contents**

(1) Product name : IR3Y81M

(2) Company name : SHARP

(3) Date code

(Example) YY WW X

Indicates the product was manufactured
in the WWth week of 19YY.

Denotes the production ref. code.

Denotes the production week.

(01, 02, 03, 52, 53)

Denotes the production year.

(Lower two digits of the year.)

(4) The marking of "JAPAN" indicates the country of origin.

2-2. Marking layout

Refer to drawing No. AA1035

(This layout does not define the dimensions of marking character and marking position.)

3. Packing Specification**3-1. Packing materials**

Material Name	Material Specification	Purpose
Tray	Conductive plastic (80devices/tray)	Fixing of device
Upper cover tray	Conductive plastic (1tray/case)	Fixing of device
Laminated aluminum bag	Aluminum polyethylene (1bag/case)	Drying of device
Desiccant	Silica gel	Drying of device
P P band	Polypropylene (3 pcs/case)	Device tray fixing
Inner case	Card board (800devices/case)	Packaging of device
Label	Paper	Indicates part number, quantity and date of manufacture
Outer case	Cardboard	Outer packing of device case

(Devices shall be placed into a tray in the same direction.)

3-2. Outline dimension of tray

Refer to attached drawing

4. Precaution For Unpacking(1) Unpacking should be done on the stand as well as human body treated with
anti-ESD.

(2) Conductive treatment or anti-ESD treatment is given to a tray.

Use the equivalent tray, if it is changed to another one.

SHARP

IR3Y31M

40

(7/44)

5. Surface Mount Conditions

Please perform the following conditions when mounting ICs not to deteriorate IC quality.

5-1. Soldering conditions (The following conditions are valid only for one time soldering.)

Mounting Method	Temperature and Duration	Measurement Point
Reflow soldering (air)	Peak temperature of 240°C or less, duration of less than 15 seconds above 230°C, temperature increase rate of 1~4°C/second	IC package surface
Vapor phase soldering	215°C or less, duration of less than 40 seconds above 200°C	Steam
Manual soldering (soldering iron)	260°C or less, duration of less than 10 seconds	IC outer lead surface

5-2. Conditions for removal of residual flux

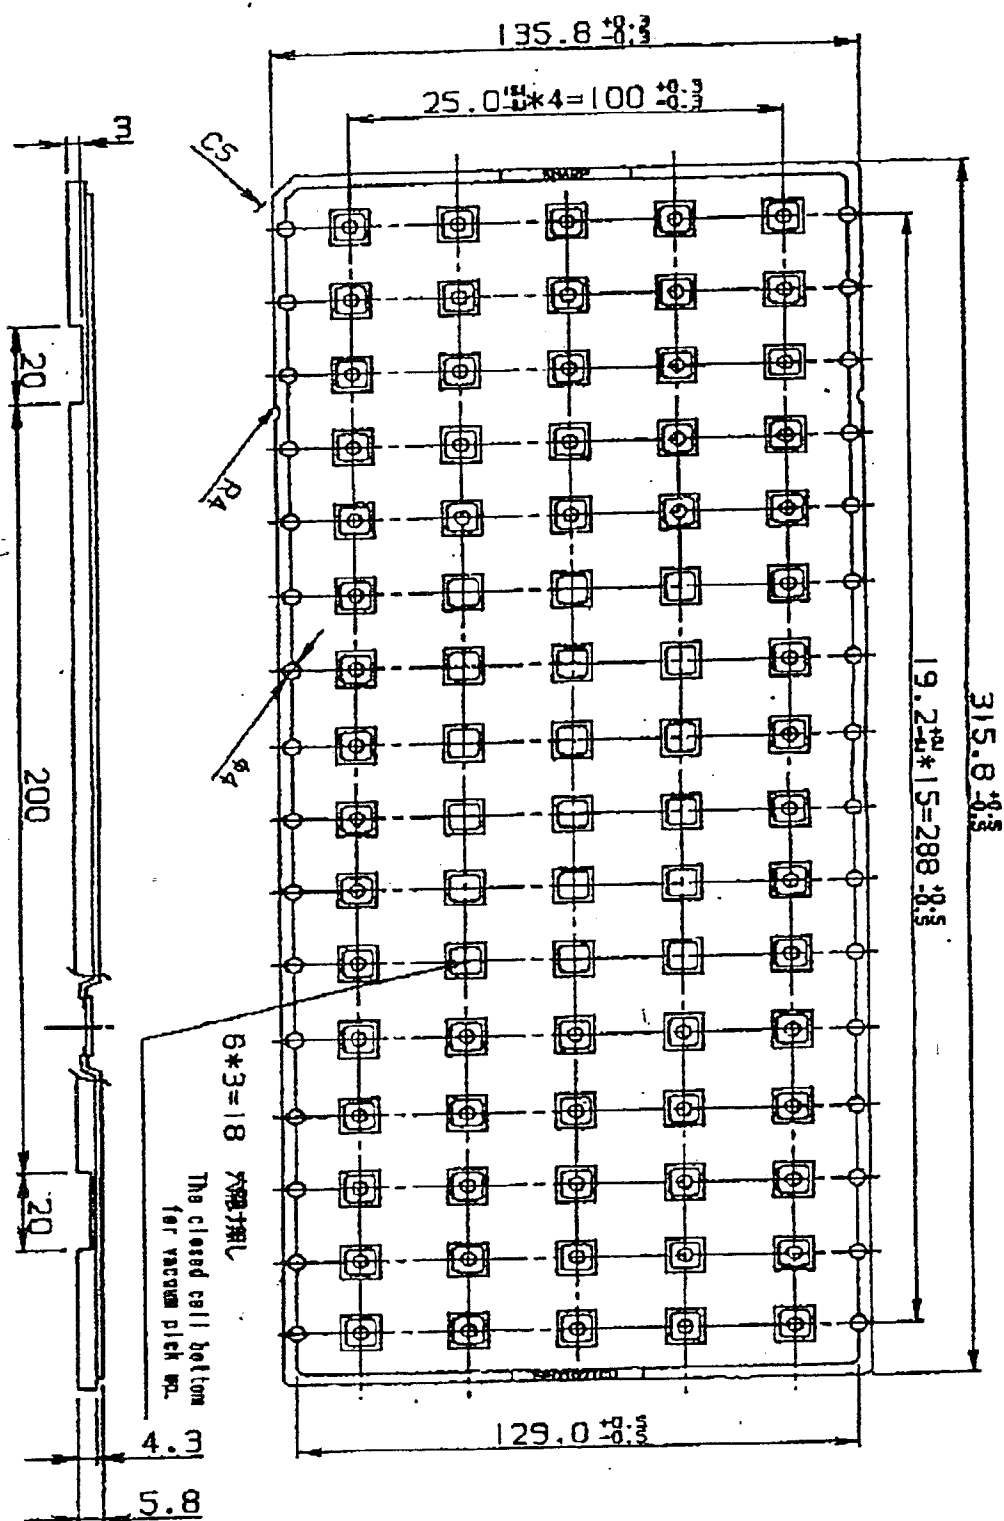
- (1) Ultrasonic washing power : 25 Watts/liter or less
- (2) Washing time : Total 1 minute maximum
- (3) Solvent temperature : 15~40°C

SHARP

IR8Y31M

42

44/44

名称
NAME

FP0707TCD

備考
NOTE

DRAWING NO.

CV536

単位
UNIT

mm