




SCHEMATIC DIAGRAM

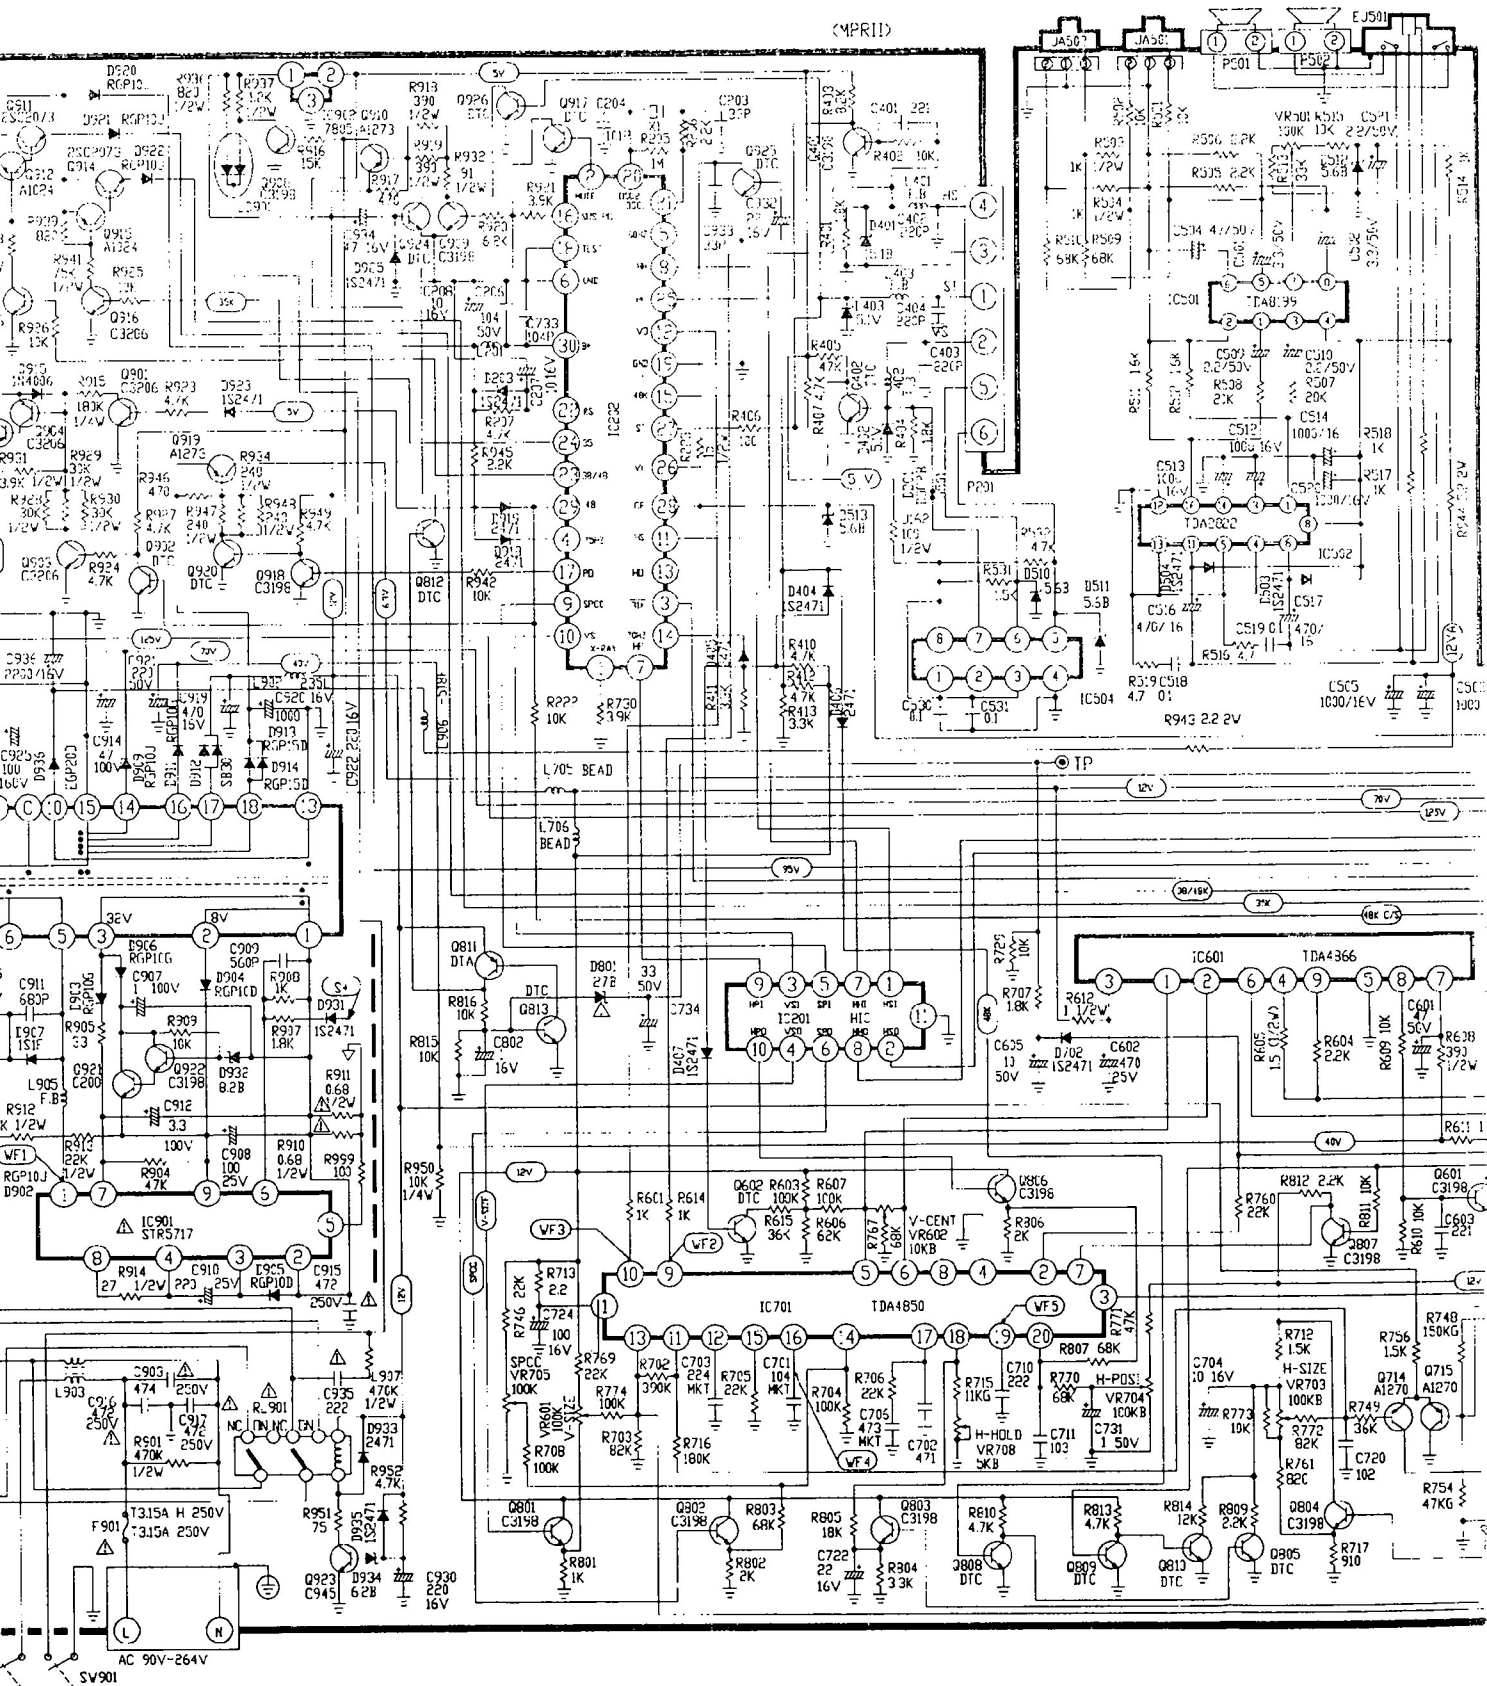

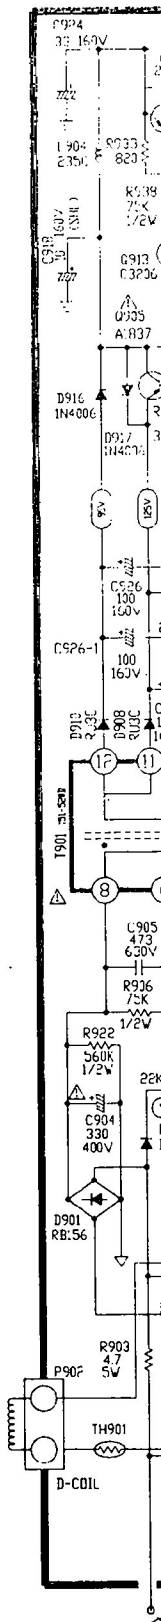

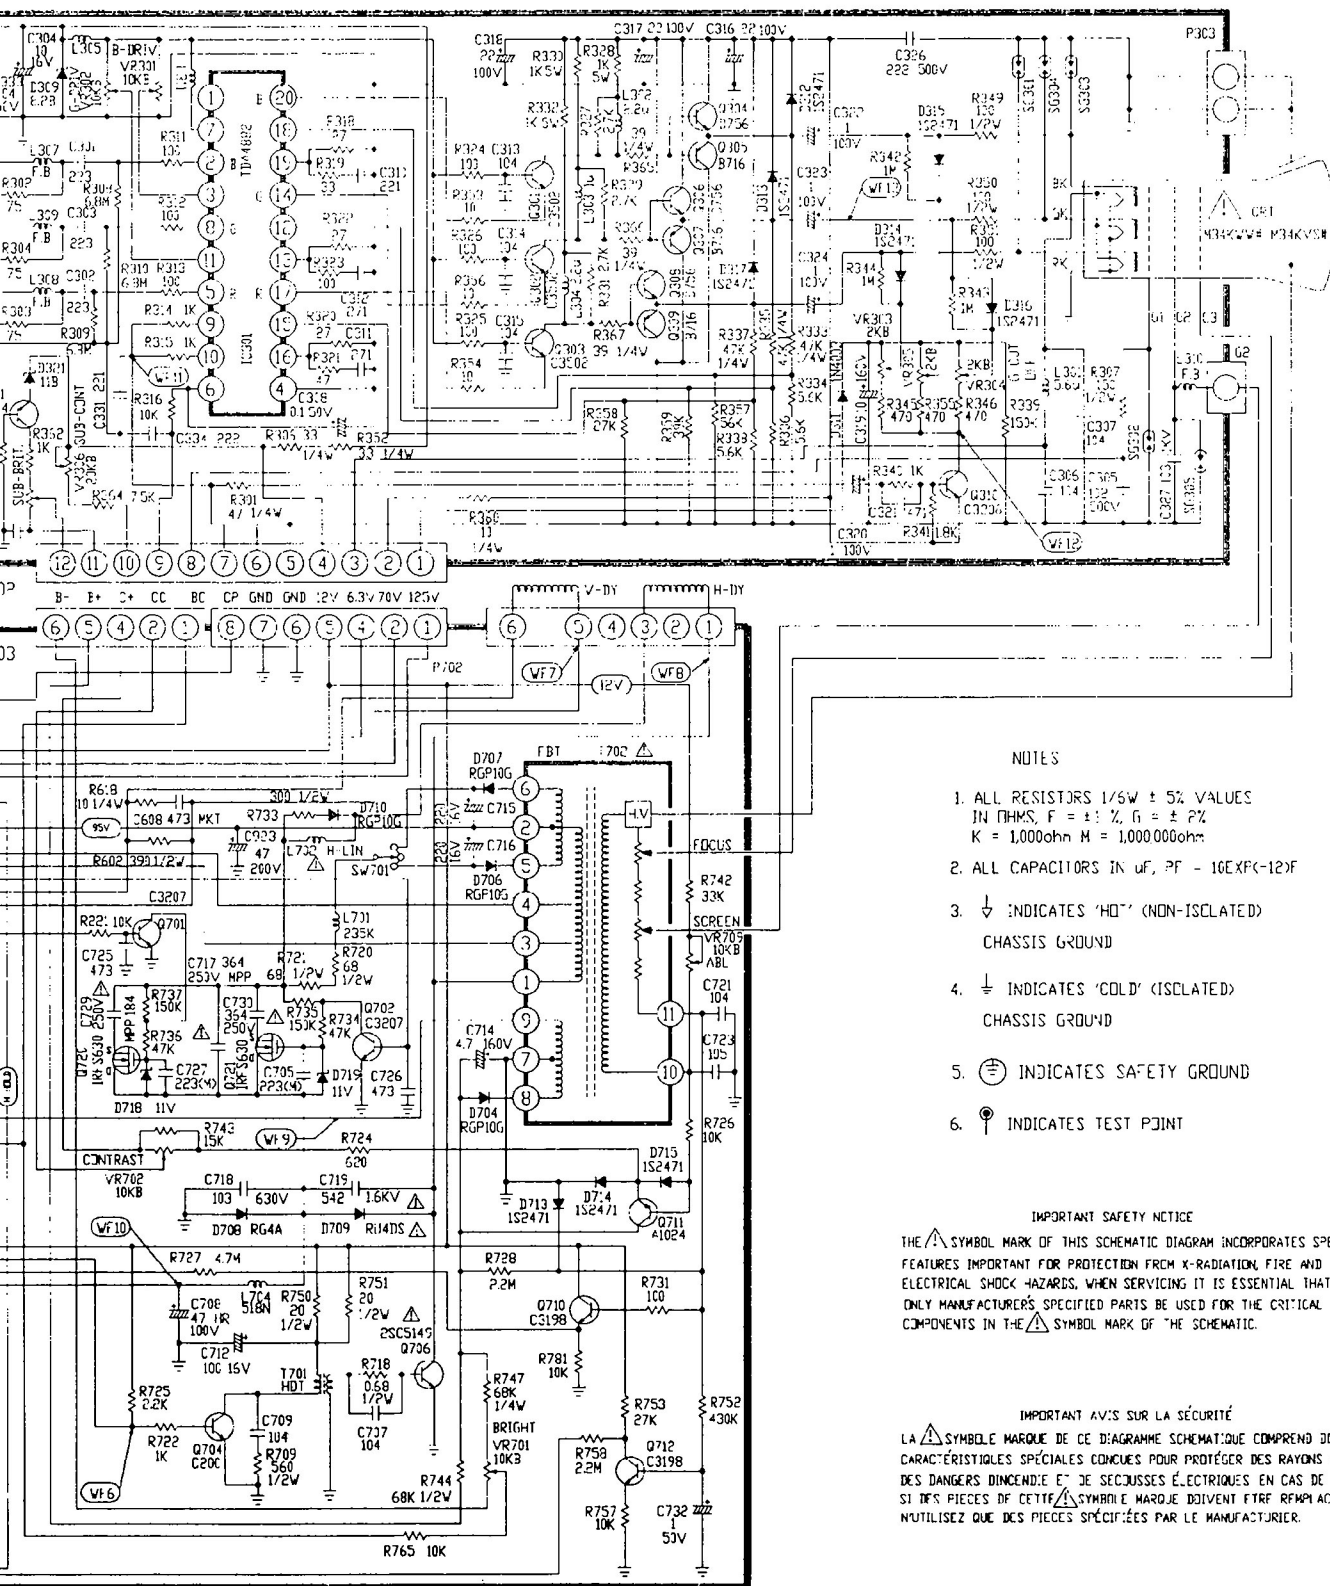

NOTES

1. ALL RESISTORS 1/5W ± 5% VALUES
IN OHMS, F = ± 1 %, G = ± 2 %
K = 1,000ohm M = 1,000,000ohm
2. ALL CAPACITORS IN uF, PF - 10EXP(-12)F
3. ↓ INDICATES 'HOT' (NON-ISLATED)
CHASSIS GROUND
4. ⊥ INDICATES 'COLD' (ISLATED)
CHASSIS GROUND
5. ⊕ INDICATES SAFETY GROUND
6. ● INDICATES TEST POINT

IMPORTANT SAFETY NOTICE

THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURER'S SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

IMPORTANT AVIS SUR LA SÉCURITÉ

LA ⚠ SYMBOLE MARQUE DE CE DIAGRAMME SCHEMATIQUE COMPREND D'IMPORTANTES CARACTÉRISTIQUES SPÉCIALES CONÇUES POUR PROTÉGER DES RAYONS X, ET DES DANGERS D'INCENDIE ET DE SECOURS ÉLECTRIQUES EN CAS DE BESOIN. SI DES PIÈCES DE CETTE ⚠ SYMBOLE MARQUE DOIVENT ÊTRE REMPLACÉES, UTILISEZ QUE DES PIÈCES SPÉCIFIÉES PAR LE MANUFACTURIER.

'95. 10. 30.

P/N : 484 392A

(M2R11)

